


MPCL41.21

Clippable assembly profile

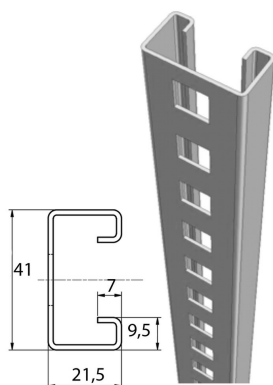

Ideal in combination with the KCL support bracket.

Standard finish

Pre-galvanised

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk	📦	Stock	Unit
-	MPCL41.21.150.200	41	21		210	0,240	10	v	STK
-	MPCL41.21.150.300	41	21		300	0,340	10	v	STK
-	MPCL41.21.150.400	41	21		420	0,480	10	v	STK
-	MPCL41.21.150.500	41	21		510	0,580	10	v	STK
-	MPCL41.21.150.600	41	21		600	0,680	10	v	STK
-	MPCL41.21.150.800	41	21		810	0,920	10	v	STK
-	MPCL41.21.150.3	41	21		3000	1,150	3	v	M

To order per full packaging.

Is preassembled with support brackets, the resulting assembly clips into the KPCL.

Fix the KPCL to the ceiling, then slide in the profile locking it in place.

Protection cap in yellow PVC: DOP41.21