


MPCL41.21

Clippable assembly profile

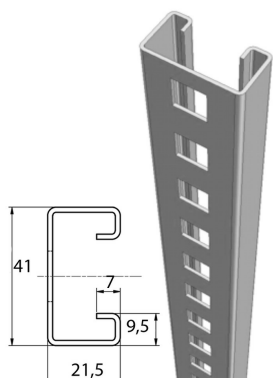

Ideal in combination with the KCL support bracket.

Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Unit
MPCL41.21.150.200	41	21	1,5	210	0,240	10	STK
MPCL41.21.150.300	41	21	1,5	300	0,340	10	STK
MPCL41.21.150.400	41	21	1,5	420	0,480	10	STK
MPCL41.21.150.500	41	21	1,5	510	0,580	10	STK
MPCL41.21.150.600	41	21	1,5	600	0,680	10	STK
MPCL41.21.150.800	41	21	1,5	810	0,920	10	STK
MPCL41.21.150.3	41	21	1,5	3000	1,150	3	M

Is preassembled with support brackets, the resulting assembly clips into the KPCL.

Fix the KPCL to the ceiling, then slide in the profile locking it in place.

Protection cap in yellow PVC: DOP41.21.

Always order the width of the cable tray + 50 mm.