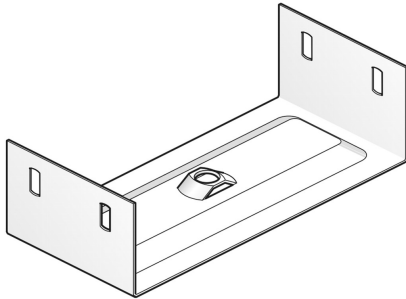


BG
Inside bracket


Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating
Optional finish	Height 35 mm

Width	Max. load (in daN)
BG075	200
BG100	200
BG150	200
BG200	150
BG250	120
BG300	90
BG400	30

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
HD	BG60.075	54	70			0,2	12	v	STK
HD	BG60.100	54	95			0,21	12	v	STK
HD	BG60.150	54	145			0,27	12	v	STK
HD	BG60.200	54	195			0,33	12	v	STK
HD	BG60.250	54	245			0,38	12	v	STK
HD	BG60.300	54	295			0,43	6	v	STK
HD	BG60.400	54	395			0,53	6	v	STK

To order per full packaging.

Delivered with nut M10.

To be fixed with threaded rod TIM10.