


DR15.30

Supporting profile

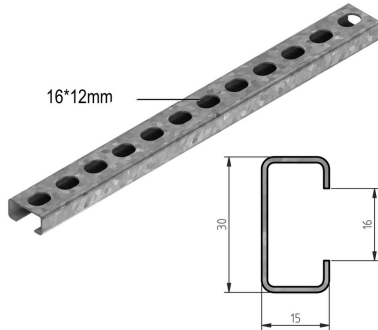

Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

Optional finish

Coating

| HD | Reference | ↑ mm | ↔ mm | ≡ mm | ↔ mm | kg /stk | | Stock | Unit |
|----|--------------|---------|---------|---------|---------|------------|----|-------|------|
| HD | DR100 | 15 | 30 | | 100 | 0,060 | 10 | v | STK |
| HD | DR150 | 15 | 30 | | 150 | 0,080 | 10 | v | STK |
| HD | DR200 | 15 | 30 | | 200 | 0,110 | 10 | v | STK |
| HD | DR250 | 15 | 30 | | 250 | 0,130 | 10 | v | STK |
| HD | DR300 | 15 | 30 | | 300 | 0,160 | 10 | v | STK |
| HD | DR350 | 15 | 30 | | 350 | 0,190 | 10 | v | STK |
| HD | DR15.30.2000 | 15 | 30 | | 2000 | 0,600 | 2 | | M |

To be fixed with two threaded rods TIM8 + nut M8 + CRO8.

Always order the width of the cable tray + 50 mm.