


## HDVS41.00-39

### Assembly accessory clippable

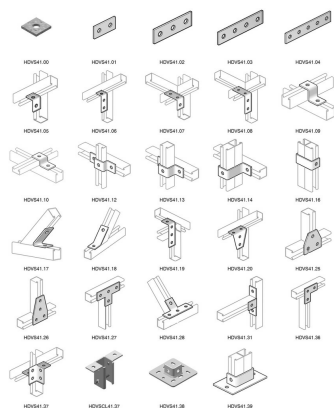

Standard finish

Hot-dip galvanised

Optional finish

Duplex system

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
-	HDVS41.00		40			0,065	24	v	STK
-	HDVS41.01		40			0,130	24	v	STK
-	HDVS41.02		40			0,190	24	v	STK
-	HDVS41.03		40			0,260	24	v	STK
-	HDVS41.04		40			0,320	24	v	STK
-	HDVS41.05		40			0,130	24	v	STK
-	HDVS41.06		40			0,190	24	v	STK
-	HDVS41.07		40			0,200	24	v	STK
-	HDVS41.08		40			0,260	24	v	STK
-	HDVS41.09		40			0,190	24	v	STK
-	HDVS41.10		40			0,160	24	v	STK
-	HDVS41.12		40			0,260	12	v	STK
-	HDVS41.13		40			0,320	12	v	STK
-	HDVS41.14		40			0,460	12	v	STK
-	HDVS41.16		40			0,270	12	v	STK
-	HDVS41.17		40			0,240	12	v	STK
-	HDVS41.18		40			0,210	12	v	STK
-	HDVS41.19		40			0,270	12	v	STK
-	HDVS41.20		40			0,350	12	v	STK
-	HDVS41.25		40			0,250	12	v	STK
-	HDVS41.26		40			0,360	12	v	STK
-	HDVS41.27		40			0,290	12	v	STK
-	HDVS41.28		40			0,290	12	v	STK
-	HDVS41.31		40			0,340	12	v	STK
-	HDVS41.36		40			0,210	12	v	STK
-	HDVS41.37		40			0,470	12	v	STK
-	HDVSC41.37					0,800	6	v	STK
-	HDVS41.38		40			0,640	12	v	STK
-	HDVS41.39		40			0,920	4	v	STK

To order per full packaging.