


WKMP41.41

Bolt-on wall bracket MP41.41

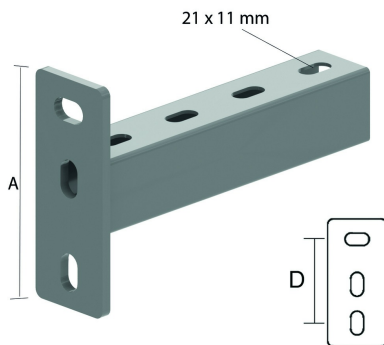

	Max. load (in daN)	A	D
WKMP41.41.300	500	132	93
WKMP41.41.400	350	132	93
WKMP41.41.500	275	132	93
WKMP41.41.600	200	132	93
WKMP41.41.750	180	132	93
WKMP41.41.1000	130	132	93

Reference	↑ mm	↔ mm	→ ← mm	↔ mm	kg/stk	Unit	Unit
WKMP41.41.300	132	300			1,027	1	STK
WKMP41.41.400	132	400			1,276	1	STK
WKMP41.41.500	132	500			1,525	1	STK
WKMP41.41.600	132	600			1,774	1	STK
WKMP41.41.750	132	750			2,147	1	STK
WKMP41.41.1000	132	1000			2,770	1	STK
HDWKMP41.41.300	132	300			1,027	1	STK
HDWKMP41.41.400	132	400			1,276	1	STK
HDWKMP41.41.500	132	500			1,525	1	STK
HDWKMP41.41.600	132	600			1,774	1	STK
HDWKMP41.41.750	132	750			2,147	1	STK
HDWKMP41.41.1000	132	1000			2,770	1	STK

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

When used with cable ladders, please pay attention to the length.