


DR15.30  
Supporting profile

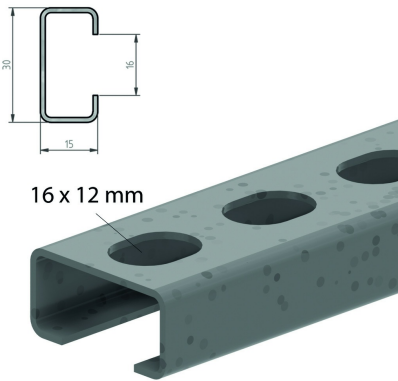

Max. load: 100 daN

| Reference    | <div>↑↓</div> <div>mm</div> | <div>↔</div> <div>mm</div> | <div>→  ←</div> <div>mm</div> | <div>↔</div> <div>mm</div> | kg/stk | <div>📦</div> | Unit |
|--------------|-----------------------------|----------------------------|-------------------------------|----------------------------|--------|--------------|------|
| DR100        | 15                          | 30                         |                               | 100                        | 0,060  | 10           | STK  |
| DR150        | 15                          | 30                         |                               | 150                        | 0,080  | 10           | STK  |
| DR200        | 15                          | 30                         |                               | 200                        | 0,110  | 10           | STK  |
| DR250        | 15                          | 30                         |                               | 250                        | 0,130  | 10           | STK  |
| DR300        | 15                          | 30                         |                               | 300                        | 0,160  | 10           | STK  |
| DR350        | 15                          | 30                         |                               | 350                        | 0,190  | 10           | STK  |
| DR15.30.2000 | 15                          | 30                         |                               | 2000                       | 0,600  | 40           | M    |

To be fixed with two threaded rods TIM8 + nut M8 + CRO8.  
Always order the width of the cable tray + 50 mm.