


I6B90

Horizontal bend 90°

Slides over the cable trays

Radius: 100 mm

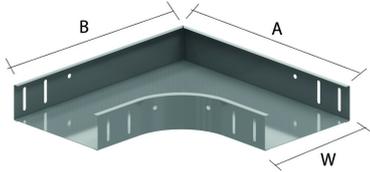

| | | | | | | | | |
|---|-----|-----|-----|-----|-----|-----|-----|-----|
| W | 75 | 100 | 150 | 200 | 300 | 400 | 500 | 600 |
| A | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |
| B | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |

| Reference | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Unit |
|---------------------|---------|---------|------------|---------|--------|---|------|
| I6B90.60.100 | 60 | 100 | | | 0,880 | 1 | STK |
| I6B90.60.200 | 60 | 200 | | | 1,450 | 1 | STK |
| I6B90.60.300 | 60 | 300 | | | 2,130 | 1 | STK |
| I6B90.60.400 | 60 | 400 | | | 2,940 | 1 | STK |

Fix with:



Toothed round head bolt / flange nut
I6VM

Pickled and passivated.