


# I6KLZB

## Horizontal bend for I6KLZ

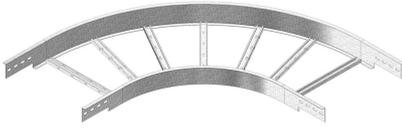

Radius: 600 mm

Reference	↕ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Unit
<b>I6KLZB200</b>	150	208			8,912	1	STK
<b>I6KLZB300</b>	150	308			9,940	1	STK
<b>I6KLZB400</b>	150	408			10,967	1	STK
<b>I6KLZB500</b>	150	508			11,995	1	STK
<b>I6KLZB600</b>	150	608			13,022	1	STK

Minimum number bolts and nuts: 8 pieces.

Pickled and passivated.

### Fix with:



Round head  
square neck bolt  
(DIN 603)  
I6RBK

Nut (DIN 934)  
I6M



Giant washer  
(DIN 125-1 A)  
I6RO