


# I6KLZT

## T-piece for I6KLZ

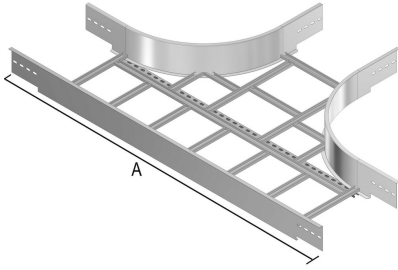

Radius: 600 mm

	200	300	400	500	600
A	1962	2062	2162	2262	2362

Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Unit
<b>I6KLZT200</b>	150	208			16,934	1	STK
<b>I6KLZT300</b>	150	308			18,394	1	STK
<b>I6KLZT400</b>	150	408			19,707	1	STK
<b>I6KLZT500</b>	150	508			21,020	1	STK
<b>I6KLZT600</b>	150	608			20,921	1	STK

### Fix with:



Round head  
square neck bolt  
(DIN 603)  
I6RBK

Nut (DIN 934)  
I6M

Minimum number bolts and nuts: 12 pieces.

Pickled and passivated.



Giant washer  
(DIN 125-1 A)  
I6RO