


# I6KLZVSB

## Flexible (rising / low) bend for I6KLZ

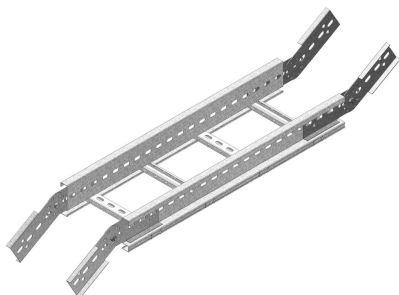

Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Unit
<b>I6KLZVSB200</b>	150	218		1135	13,680	1	STK
<b>I6KLZVSB300</b>	150	318		1135	14,000	1	STK
<b>I6KLZVSB400</b>	150	418		1135	14,320	1	STK
<b>I6KLZVSB500</b>	150	518		1135	14,640	1	STK
<b>I6KLZVSB600</b>	150	618		1135	14,964	1	STK

Minimum number bolts and nuts: 8 pieces.

Pickled and passivated.

### Fix with:



Round head  
square neck bolt  
(DIN 603)  
I6RBK

Nut (DIN 934)  
I6M



Giant washer  
(DIN 125-1 A)  
I6RO