


# I6KLZX

## Cross-over for I6KLZ

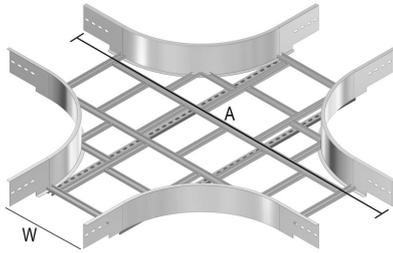

Radius: 600 mm

	200	300	400	500	600
A	1962	2062	2162	2262	2362

Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Unit
<b>I6KLZX200</b>	150	208			21,007	1	STK
<b>I6KLZX300</b>	150	308			22,481	1	STK
<b>I6KLZX400</b>	150	408			23,807	1	STK
<b>I6KLZX500</b>	150	508			25,135	1	STK
<b>I6KLZX600</b>	150	608			24,771	1	STK

### Fix with:



Round head  
square neck bolt  
(DIN 603)  
I6RBK

Nut (DIN 934)  
I6M

Minimum number bolts and nuts: 16 pieces.

Pickled and passivated.



Giant washer  
(DIN 125-1 A)  
I6RO