


# I6WSU

## Universal support bracket

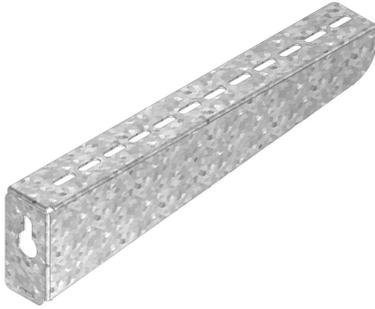

For direct fixing on the wall

Width	Max. load (in daN)
100	120
150	120
200	120
250	120
300	120
400	120
500	120
600	120

Reference	↑ mm	↔ mm	→  ← mm	↔ mm	kg/stk	📦	Unit
<b>I6WSU100</b>	60	128			0,208	24	STK
<b>I6WSU150</b>	66	178			0,291	24	STK
<b>I6WSU200</b>	73	228			0,378	24	STK
<b>I6WSU250</b>	79	278			0,469	12	STK
<b>I6WSU300</b>	85	328			0,563	12	STK
<b>I6WSU400</b>	98	428			0,763	12	STK
<b>I6WSU500</b>	110	528			0,978	6	STK
<b>I6WSU600</b>	122	628			1,209	6	STK

Max. load (in daN): uniformly distributed over complete width of cantilever brackets.

Pickled and passivated.