
P1000TTTSPP

Assembly profile perforation on 3 sides

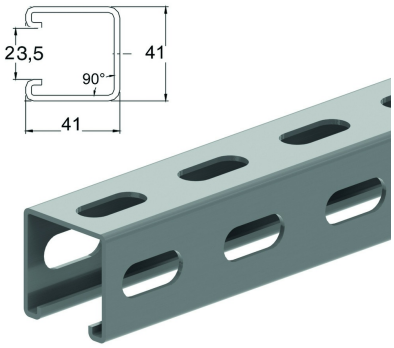

Reference	↕ mm	↔ mm	→‖← mm	⇄ mm	kg/m		Unit
P1000TTTVSPP	41	41	2,5	6000	2,362	720	M
P1000TTTVSPPX3	41	41	2,5	300	2,362	600	M

Pickled and passivated. Stainless steel 316.