


## OBG

## Upper bracket

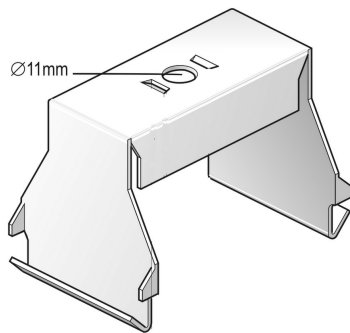

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating

	Max. Load (in daN)
OBG050	200
OBG075	200
OBG100	200
OBG150	200
OBG200	200
OBG250	150
OBG300	150
OBG400	90

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
HD	OBG050	64	55			0,1	12	v	STK
HD	OBG075	64	80			0,13	12	v	STK
HD	OBG100	64	105			0,14	12	v	STK
HD	OBG150	64	155			0,19	12	v	STK
HD	OBG200	64	205			0,22	12	v	STK
HD	OBG250	64	255			0,27	12	v	STK
HD	OBG300	64	305			0,31	6	v	STK
HD	OBG400	64	405			0,39	6	v	STK

To order per full packaging.

To be mounted with threaded rod TIM8 or TIM10.