


ZCL

Z-support clippable

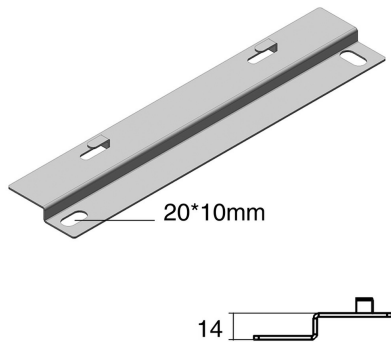

Standard finish

Pre-galvanised

Optional finish

Hot-dip galvanised

	Max. load (in daN)
ZCL100	150
ZCL150	150
ZCL200	120
ZCL300	105
ZCL400	90
ZCL500	80
ZCL600	65

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /stk		Stock	Unit
HD	ZCL100	14	60		180	0,135	12 v		STK
HD	ZCL150	14	60		230	0,165	12 v		STK
HD	ZCL200	14	60		280	0,21	12 v		STK
HD	ZCL300	14	60		380	0,265	12 v		STK
HD	ZCL400	14	60		480	0,315	12 v		STK
HD	ZCL500	14	60		580	0,365	12 v		STK
HD	ZCL600	14	60		680	0,415	12 v		STK

To order per full packaging.