
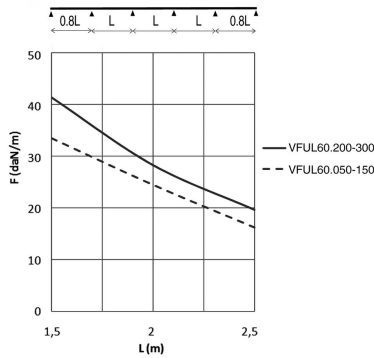
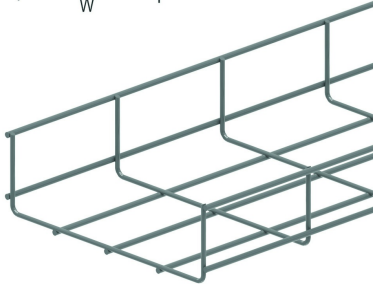


# VFUL60

## Wire cable tray



Screen: 50 x 100 mm  
 Cross-wire: Ø 3.50 mm  
 Lengthwise wire: Ø 4.50 mm

Reference	Finish	↑ mm	↔ mm	→  ← mm	↔ mm	kg/m	📦	Unit
<b>VFUL60.050</b>	SZ	60	50		3000	0,570	30	M
<b>VFUL60.100</b>	SZ	60	96		3000	0,830	30	M
<b>VFUL60.150</b>	SZ	60	146		3000	0,870	30	M
<b>VFUL60.200</b>	SZ	60	197		3000	1,030	30	M
<b>VFUL60.300</b>	SZ	60	297		3000	1,330	30	M
<b>ZAVFUL60.050</b>	DF	60	50		3000	0,570	30	M
<b>ZAVFUL60.100</b>	DF	60	100		3000	0,830	30	M
<b>ZAVFUL60.150</b>	DF	60	146		3000	0,870	30	M
<b>ZAVFUL60.200</b>	DF	60	197		3000	1,030	30	M
<b>ZAVFUL60.300</b>	DF	60	297		3000	1,330	30	M

### LOAD DIAGRAM


This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)  
 L = support distance (m)  
 Max. deflection (m) = L/100


### Fix with:



Support joiner for VFU(L) VFKS



Snap-on joiner for VFU(L) KPVF



Joining clamp VFK

### NEW

Our VFUL60 wire cable tray is now available in zinc aluminium (ZA). This coating offers a corrosion protection at least as long as the standard hot dip galvanizing process. Zinc aluminum (ZA) is identified with a small plate.

Usable inside height: outside height - 7mm  
 Usable inside width: outside width - 15mm

### Legend finish

- SZ = Sendzimir
- DF = Defender