


# VFUL60
## Wire cable tray

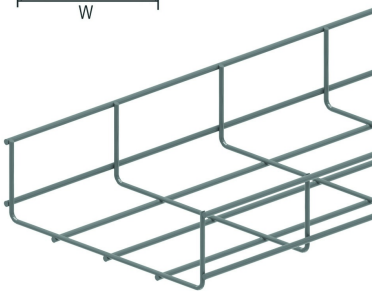

Screen: 50 x 100 mm
Cross-wire: Ø 3.50 mm
Lengthwise wire: Ø 4.50 mm

| Reference | Finish | ↕ mm | ↔ mm | →‖← mm | ⇄ mm | kg/m | 📦 | Unit |
|---|---|---|---|---|---|---|---|---|
| **VFUL60.050** | SZ | 60 | 50 | | 3000 | 0,570 | 30 | M |
| **VFUL60.100** | SZ | 60 | 96 | | 3000 | 0,830 | 30 | M |
| **VFUL60.150** | SZ | 60 | 146 | | 3000 | 0,870 | 30 | M |
| **VFUL60.200** | SZ | 60 | 197 | | 3000 | 1,030 | 30 | M |
| **VFUL60.300** | SZ | 60 | 297 | | 3000 | 1,330 | 30 | M |
| **ZAVFUL60.050** | DF | 60 | 50 | | 3000 | 0,570 | 30 | M |
| **ZAVFUL60.100** | DF | 60 | 100 | | 3000 | 0,830 | 30 | M |
| **ZAVFUL60.150** | DF | 60 | 146 | | 3000 | 0,870 | 30 | M |
| **ZAVFUL60.200** | DF | 60 | 197 | | 3000 | 1,030 | 30 | M |
| **ZAVFUL60.300** | DF | 60 | 297 | | 3000 | 1,330 | 30 | M |

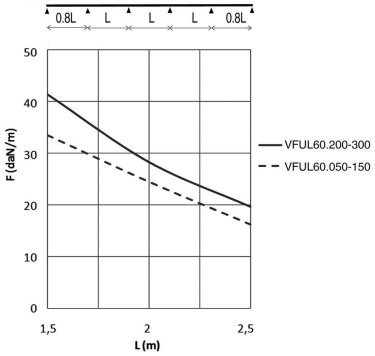


**LOAD DIAGRAM**
This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)
L = support distance (m)
Max. deflection (m) = L/100

**NEW**
Our VFUL60 wire cable tray is now available in zinc aluminium (ZA). This coating offers a corrosion protection at least as long as the standard hot dip galvanizing process.
Zinc aluminum (ZA) is identified with a small plate.


Usable inside height: outside height - 7mm
Usable inside width: outside width - 15mm

**Legend finish**
- SZ = Sendzimir
- DF = Defender

## Fix with:



Support joiner for VFU(L)
VFKS



Snap-on joiner for VFU(L)
KPVF