
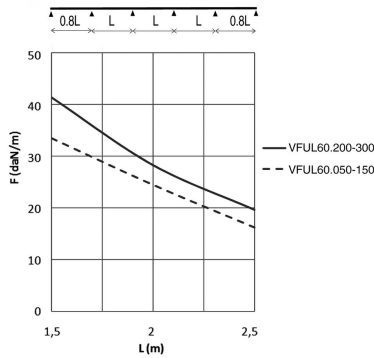
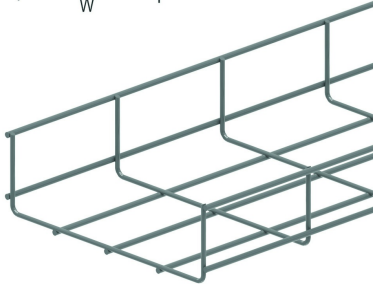


VFUL60

Wire cable tray



Screen: 50 x 100 mm
 Cross-wire: Ø 3.50 mm
 Lengthwise wire: Ø 4.50 mm

| Reference | Finish | ↑ mm | ↔ mm | → ← mm | ↔ mm | kg/m | 📦 | Unit |
|---------------------|--------|---------|---------|------------|---------|-------|----|------|
| VFUL60.050 | SZ | 60 | 50 | | 3000 | 0,570 | 30 | M |
| VFUL60.100 | SZ | 60 | 96 | | 3000 | 0,830 | 30 | M |
| VFUL60.150 | SZ | 60 | 146 | | 3000 | 0,870 | 30 | M |
| VFUL60.200 | SZ | 60 | 197 | | 3000 | 1,030 | 30 | M |
| VFUL60.300 | SZ | 60 | 297 | | 3000 | 1,330 | 30 | M |
| ZAVFUL60.050 | DF | 60 | 50 | | 3000 | 0,570 | 30 | M |
| ZAVFUL60.100 | DF | 60 | 100 | | 3000 | 0,830 | 30 | M |
| ZAVFUL60.150 | DF | 60 | 146 | | 3000 | 0,870 | 30 | M |
| ZAVFUL60.200 | DF | 60 | 197 | | 3000 | 1,030 | 30 | M |
| ZAVFUL60.300 | DF | 60 | 297 | | 3000 | 1,330 | 30 | M |

LOAD DIAGRAM


This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection to 1/5 of the span and the end span = 0,8x the span. When the joint is situated in the centre of the span, a reduction of 0,7x the admissible load is to be taken into account.

F = max. admissible load (daN/m)
 L = support distance (m)
 Max. deflection (m) = L/100

Fix with:



Support joiner for
VFU(L)
VFKS



Snap-on joiner for
VFU(L)
KPVF

NEW

Our VFUL60 wire cable tray is now available in zinc aluminium (ZA). This coating offers a corrosion protection at least as long as the standard hot dip galvanizing process. Zinc aluminum (ZA) is identified with a small plate.

Usable inside height: outside height - 7mm
 Usable inside width: outside width - 15mm

Legend finish

- SZ = Sendzimir
- DF = Defender