


## SLOS

## Bolt-in partition

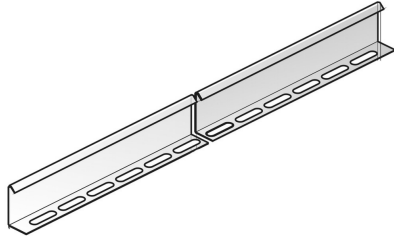


Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
HD	SLOS35	35			3000	0,330	150	v	M
HD	SLOS60	60			3000	0,511	120	v	M
HD	SLOS85	85			3000	0,680	60	v	M
HD	SLOS110	110			3000	0,820	30	v	M

Fix with:

Toothed round  
head bolt / flange  
nut

VM

Round head  
square neck bolt  
/ flange nut

VMK

Fixing set: 1 per meter.