


KBS110.6

Perforated cable tray



Alternative perforation
Return flanges
Support distance up to 6 meter


Reference	↔ mm	↔ mm	→ ← mm	↔ mm	kg/m	Unit
KBS110.200.150.6	110	200	1,5	6000	4,300	24 M
KBS110.300.150.6	110	300	1,5	6000	5,280	24 M
KBS110.400.150.6	110	400	1,5	6000	6,250	24 M
KBS110.500.150.6	110	500	1,5	6000	7,230	24 M
KBS110.600.150.6	110	600	1,5	6000	8,210	24 M

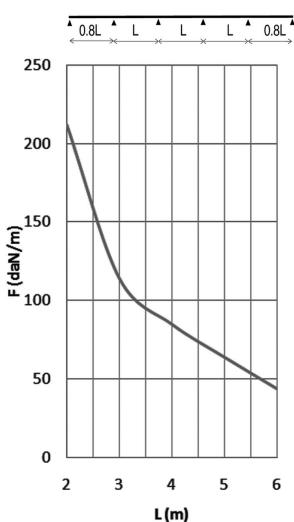

Fix with:



Toothed round head bolt / flange
nut
VM



Alternative perforations for:

- better fixing to supports
- very useful for attaching cables.

TECHNICAL INFORMATION

The perforation scheme differs according to the width.

Alternative perforation beginning at 200 mm.

Round holes of Ø 16 mm and Ø 19.5 mm provided as opening for the fitting of a gland.



Joiner for
KBS110.6
KPW