



KBSM(I)60

Cable tray machine constr. interl. ends

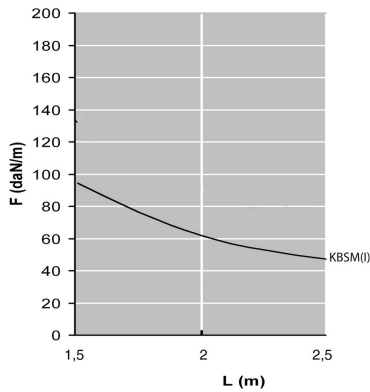

Fix with:

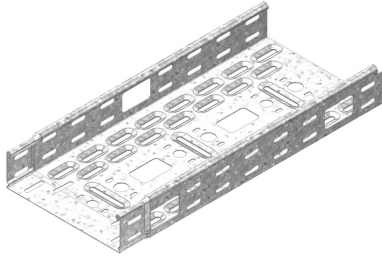

Fast locking for
KBSI
KBV



Toothed round
head bolt / flange
nut
VM

Can be used with RBKBSM

Alternative perforation

Return flanges

Standard finish

Pre-galvanised

Optional finish

Coating

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
-	KBSM60.050.100	60	50	1	3000	1,24	3	v	M
-	KBSMI60.075.100	60	75	1	3000	1,4	3	v	M
-	KBSMI60.100.100	60	100	1	3000	1,56	3	v	M
-	KBSMI60.150.100	60	150	1	3000	1,89	3	v	M
-	KBSMI60.200.100	60	200	1	3000	2,22	3	v	M
-	KBSMI60.300.100	60	300	1	3000	2,87	3	v	M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3 test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

CHARACTERISTICS

- The cable outlet holes allow the cable trays to be used in machine constructions, especially in the field of internal transport. The KBSMI cable trays can also be combined with KBSI and KGI.
- Can be used as lighting rail by immediately connecting through bottom perforations M16 and M20.
- Staggered slots in sides and bottom for easy connection with accessories.
- To be used with standard accessories, such as the cover with swivel clamp.
- Only DCO to be used with cover.