

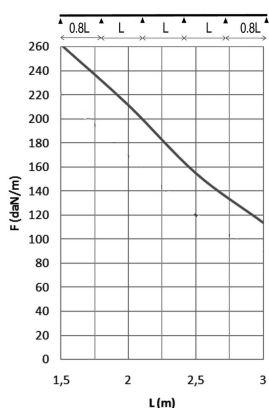


KG110

Cable tray not perforated

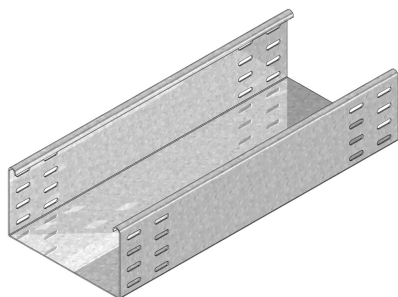

Fix with:



Joiner
V110.200



Toothed round
head bolt / flange
nut
VM

Not perforated
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating
Optional finish	Height 85 mm

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
HD	KG110.100.150	110	100	1,5	3000	4	18	v	M
HD	KG110.150.150	110	150	1,5	3000	4,59	18	v	M
HD	KG110.200.150	110	200	1,5	3000	5,18	18	v	M
HD	KG110.300.150	110	300	1,5	3000	6,36	18	v	M
HD	KG110.400.150	110	400	1,5	3000	7,54	18	v	M
HD	KG110.500.150	110	500	1,5	3000	8,71	18	v	M
HD	KG110.600.150	110	600	1,5	3000	9,89	18	v	M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100