

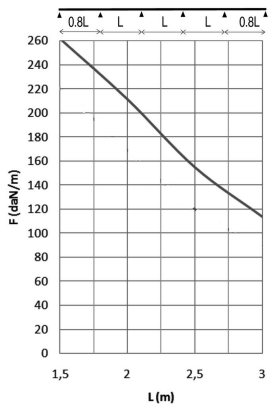


KG110S

KG with SIN

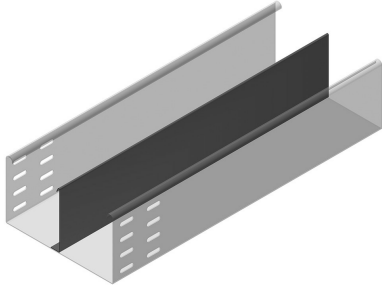

Fix with:



Joiner
V110.200



Toothed round
head bolt / flange
nut
VM

Not perforated
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating
Optional finish	Height 85 mm

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m	📦	Stock	Unit
HD	KG110.100.150S12	110	100	1,50	3000	4,82	30		M
HD	KG110.100.150S13	110	100	1,50	3000	4,82	30		M
HD	KG110.100.150S23	110	100	1,50	3000	5,64	30		M
HD	KG110.150.150S12	110	150	1,50	3000	5,41	30		M
HD	KG110.150.150S13	110	150	1,50	3000	5,41	30		M
HD	KG110.150.150S23	110	150	1,50	3000	6,23	30		M
HD	KG110.200.150S12	110	200	1,50	3000	6	30		M
HD	KG110.200.150S13	110	200	1,50	3000	6	30		M
HD	KG110.200.150S23	110	200	1,50	3000	6,82	30		M
HD	KG110.300.150S12	110	300	1,50	3000	7,18	30		M
HD	KG110.300.150S13	110	300	1,50	3000	7,18	30		M
HD	KG110.300.150S23	110	300	1,50	3000	8	30		M
HD	KG110.400.150S12	110	400	1,50	3000	8,36	30		M
HD	KG110.400.150S13	110	400	1,50	3000	8,36	30		M
HD	KG110.400.150S23	110	400	1,50	3000	9,18	30		M
HD	KG110.500.150S12	110	500	1,50	3000	9,53	30		M
HD	KG110.500.150S13	110	500	1,50	3000	9,53	30		M
HD	KG110.500.150S23	110	500	1,50	3000	10,35	30		M
HD	KG110.600.150S12	110	600	1,50	3000	10,71	30		M
HD	KG110.600.150S13	110	600	1,50	3000	10,71	30		M
HD	KG110.600.150S23	110	600	1,50	3000	11,53	30		M

LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

S12: one partition in the middle of the cable tray

S13: one partition at right or the left of the cable tray

S23: two partitions