



## KGI60S

### KGI with SIN

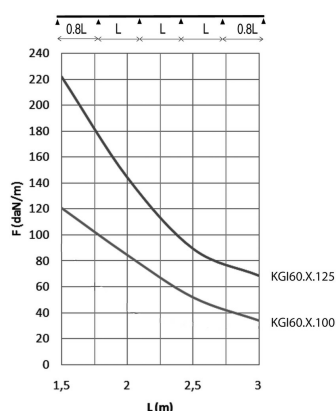

Fix with:

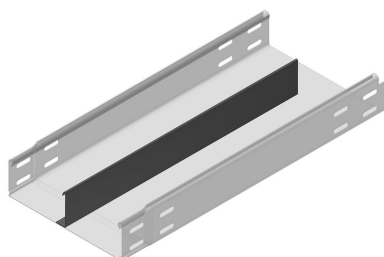

Fast locking for  
KBSI  
KBV



Toothed round  
head bolt / flange  
nut  
VM

Not perforated  
Return flanges

Standard finish	Pre-galvanised
Optional finish	Hot-dip galvanised
Optional finish	Coating
Optional finish	Height 35 mm

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
HD	KGI60.075.100S12	60	75	1,00	3000	2,211	30		M
HD	KGI60.075.100S13	60	75	1,00	3000	2,211	30		M
HD	KGI60.075.100S23	60	75	1,00	3000	2,722	30		M
HD	KGI60.100.100S12	60	100	1,00	3000	2,411	30		M
HD	KGI60.100.100S13	60	100	1,00	3000	2,411	30		M
HD	KGI60.100.100S23	60	100	1,00	3000	2,922	30		M
HD	KGI60.150.100S12	60	150	1,00	3000	2,811	30		M
HD	KGI60.150.100S13	60	150	1,00	3000	2,811	30		M
HD	KGI60.150.100S23	60	150	1,00	3000	3,322	30		M
HD	KGI60.200.100S12	60	200	1,00	3000	3,211	30		M
HD	KGI60.200.100S13	60	200	1,00	3000	3,211	30		M
HD	KGI60.200.100S23	60	200	1,00	3000	3,722	30		M
HD	KGI60.300.100S12	60	300	1,00	3000	4,011	30		M
HD	KGI60.300.100S13	60	300	1,00	3000	4,011	30		M
HD	KGI60.300.100S23	60	300	1,00	3000	4,522	30		M
-	KGI60.300.125S12	60	300	1,25	3000	4,811	30		M
-	KGI60.300.125S13	60	300	1,25	3000	4,811	30		M
-	KGI60.300.125S23	60	300	1,25	3000	5,322	30		M
HD	KGI60.400.100S12	60	400	1,00	3000	4,811	30		M
HD	KGI60.400.100S13	60	400	1,00	3000	4,811	30		M
HD	KGI60.400.100S23	60	400	1,00	3000	5,322	30		M
-	KGI60.400.125S12	60	400	1,25	3000	5,811	30		M
-	KGI60.400.125S13	60	400	1,25	3000	5,811	30		M
-	KGI60.400.125S23	60	400	1,25	3000	6,322	30		M
-	KGI60.500.125S12	60	500	1,25	3000	6,811	30		M
-	KGI60.500.125S13	60	500	1,25	3000	6,811	30		M
-	KGI60.500.125S23	60	500	1,25	3000	7,322	30		M
-	KGI60.600.125S12	60	600	1,25	3000	7,811	30		M
-	KGI60.600.125S13	60	600	1,25	3000	7,811	30		M
-	KGI60.600.125S23	60	600	1,25	3000	8,322	30		M

#### LOAD DIAGRAM

This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 with connection in the centre of the span and the end span = 0,8 x the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

S12: one partition in the middle of the cable tray

S13: one partition at right or the left of the cable tray

~~S23: two partitions~~

---

**Vergokan - 2019-12-24 - Cable trays - Vergokansales@atkore.com - Vergokanexport@atkore.com - www.vergokan.com**