


Technical drawing of a U-profile. The height is labeled $H = 35$. The width of the flange is labeled $B''binnen''$. The drawing shows a cross-section of the profile with a central vertical line indicating symmetry.

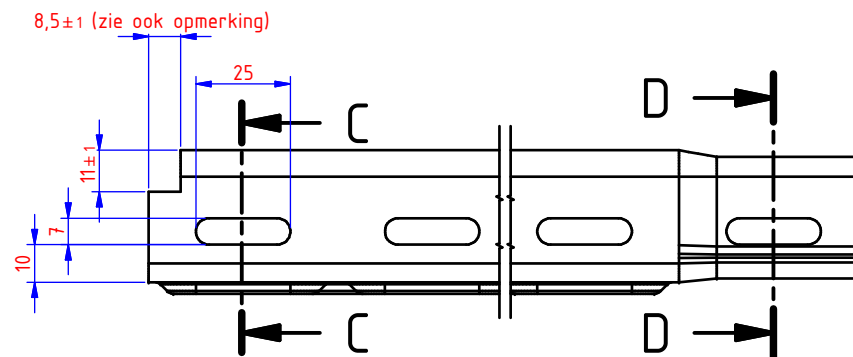

Type	dim "B (binnen)"	dim "MD"	
KBSI35.75.MD	73	0,75	1
KBSI35.100.MD	98	0,75	1
KBSI35.150.MD	148	0,75	1
KBSI35.200.MD	198	0,75	1
KBSI35.300.MD	298	0,75	1
KBSI35.400.MD	398	0,75	1

- bodem perforatie : zie KBS tekening nr 44001
- kabelgoten controleren op koppelen
- type 75 en 100 niet voorzien van uitkap 8,5x100

NOT FOR PRODUCTION

[illegible]

	Datum	Par.	Benaming	Aantal	Editie	Omschrijving van de wijziging	Datum	Visum
GET.	2/05/2008		Kabelbaan dwars- en langspervo ineenschuifbaar					
VISUM			[KBSI35.--.-]					
Materiaal:	Toleranties:	Norm:	I.S.O. SYMBOOL					
1.0037 (Sendzimir)	-	IEC 61537						

VERGOKAN

Meersbloem Melden 16
9700 Oudenaarde

Tel: 055/31.83.35
Fax: 055/31.4.3.88

Schaal:

Tekening enkel m.b.v. CAD aanpassen

PLANNUMMER 45537

FORM A4

KBAAN
P. 1
3 p.