


I6KLM100T  
Pièce en T pour I6KLM100



A fixer avec:

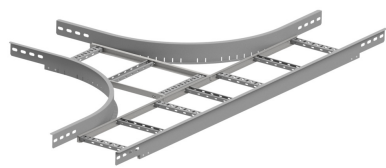

Rondelle (DIN 125-1 A)  
I6RO



Erou (DIN 934)  
I6M



Boulon à collet  
I6RBK

|               |  |  |                      |  |  |
|---------------|--|--|----------------------|--|--|
| Rayon: 600 mm |  |  |                      |  |  |
| Exec. Std.    |  |  | Acier Inoxydable 316 |  |  |

|   |      |      |      |      |      |
|---|------|------|------|------|------|
|   | 200  | 300  | 400  | 500  | 600  |
| A | 1962 | 2062 | 2162 | 2262 | 2362 |

| HD | Référence    | ↕<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/stk | 📦 | Magasin | Unité |
|----|--------------|---------|---------|------------|---------|--------|---|---------|-------|
| -  | I6KLM100T200 | 100     | 208     |            |         | 11,842 | 1 |         | STK   |
| -  | I6KLM100T300 | 100     | 308     |            |         | 13,065 | 1 |         | STK   |
| -  | I6KLM100T400 | 100     | 408     |            |         | 14,258 | 1 |         | STK   |
| -  | I6KLM100T500 | 100     | 508     |            |         | 17,142 | 1 |         | STK   |
| -  | I6KLM100T600 | 100     | 608     |            |         | 18,915 | 1 |         | STK   |

Nombre minimal des boulons et des écrous: 12 pièces.

Décapé et passivé.