


# B90

## Courbe horizontale à 90°

Emboîtables avec le chemin de câbles

Rayon: 100 mm

Sur demande: hauteur 35 mm - 85 mm - 110 mm (seulement en SZ et HD)

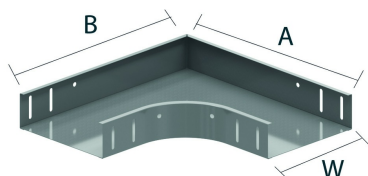


|   |     |     |     |     |     |     |     |     |     |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|   | 50  | 75  | 100 | 150 | 200 | 300 | 400 | 500 | 600 |
| A | 255 | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |
| B | 255 | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |

### A fixer avec:



Boulon et écrou  
autobloquant  
VM



Écrou  
autobloquant et  
boulon à collet  
VMK

| Référence            | Finition | ↕<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/stk | 📦 | Unité |
|----------------------|----------|---------|---------|------------|---------|--------|---|-------|
| <b>ZMB90.110.100</b> | DF       | 110     | 100     | 0,75       |         | 0,958  | 1 | STK   |
| <b>ZMB90.110.150</b> | DF       | 110     | 150     | 0,75       |         | 1,211  | 1 | STK   |
| <b>ZMB90.110.200</b> | DF       | 110     | 200     | 0,75       |         | 1,490  | 1 | STK   |
| <b>ZMB90.110.300</b> | DF       | 110     | 300     | 0,75       |         | 2,132  | 1 | STK   |
| <b>ZMB90.110.400</b> | DF       | 110     | 400     | 0,75       |         | 2,884  | 1 | STK   |
| <b>ZMB90.110.500</b> | DF       | 110     | 500     | 0,75/0,9   |         | 4,461  | 1 | STK   |
| <b>ZMB90.110.600</b> | DF       | 110     | 600     | 0,75/0,9   |         | 5,669  | 1 | STK   |
| <b>ZMB90.85.100</b>  | DF       | 85      | 100     | 0,75       |         | 0,833  | 1 | STK   |
| <b>ZMB90.85.150</b>  | DF       | 85      | 150     | 0,75       |         | 1,072  | 1 | STK   |
| <b>ZMB90.85.200</b>  | DF       | 85      | 200     | 0,75       |         | 1,338  | 1 | STK   |
| <b>ZMB90.85.300</b>  | DF       | 85      | 300     | 0,75       |         | 1,952  | 1 | STK   |
| <b>ZMB90.85.400</b>  | DF       | 85      | 400     | 0,75       |         | 2,677  | 1 | STK   |
| <b>ZMB90.85.500</b>  | DF       | 85      | 500     | 0,75/0,9   |         | 4,226  | 1 | STK   |
| <b>ZMB90.85.600</b>  | DF       | 85      | 600     | 0,75/0,9   |         | 5,407  | 1 | STK   |
| <b>ZMB90.60.050</b>  | DF       | 85      | 600     |            |         | 0,514  | 1 | STK   |
| <b>ZMB90.60.075</b>  | DF       | 85      | 500     |            |         | 0,609  | 1 | STK   |
| <b>ZMB90.60.100</b>  | DF       | 60      | 100     |            |         | 0,712  | 1 | STK   |
| <b>ZMB90.60.150</b>  | DF       | 60      | 150     |            |         | 0,937  | 1 | STK   |
| <b>ZMB90.60.200</b>  | DF       | 60      | 200     |            |         | 1,189  | 1 | STK   |
| <b>ZMB90.60.300</b>  | DF       | 60      | 300     |            |         | 1,777  | 1 | STK   |
| <b>ZMB90.60.400</b>  | DF       | 60      | 400     |            |         | 2,475  | 1 | STK   |
| <b>ZMB90.60.500</b>  | DF       | 60      | 500     |            |         | 3,997  | 1 | STK   |
| <b>ZMB90.60.600</b>  | DF       | 60      | 600     |            |         | 5,151  | 1 | STK   |

Nombre minimal des boulons et des écrous: 8 pièces.

### Légende de la finition

- DF = Defender

