


# SKL60

## Echelle à câbles montante

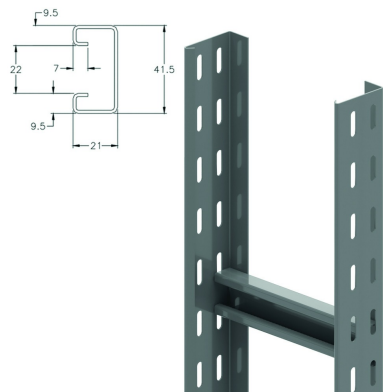


Longerons: profil en L perforé  
 Echelons en C 41x21 mm

Hauteur utile: 39 mm  
 Distance échelons: 500 mm  
 Charge max.: 114 kg/échelon

| Référence        | ↑<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/m  | 📦  | Unité |
|------------------|---------|---------|------------|---------|-------|----|-------|
| <b>SKL60.200</b> | 60      | 200     |            | 3000    | 2,430 | 24 | M     |
| <b>SKL60.300</b> | 60      | 300     |            | 3000    | 2,670 | 24 | M     |
| <b>SKL60.400</b> | 60      | 400     |            | 3000    | 2,930 | 24 | M     |
| <b>SKL60.500</b> | 60      | 500     |            | 3000    | 3,070 | 24 | M     |
| <b>SKL60.600</b> | 60      | 600     |            | 3000    | 3,330 | 24 | M     |

### A fixer avec:



Eclisse à  
 boulonner  
 V60.200



Boulon et écrou  
 autobloquant  
 VM