


WKUMPCL41.41
Console MP41.41 encliq. pour pendent

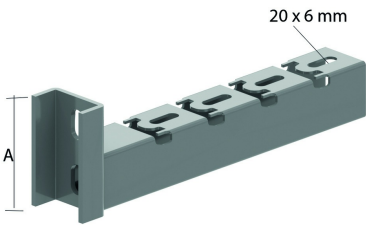

Exec. Std.	Electro Zingué
Mat. Opt.	Galvanisé à chaud

	Charge Maximale (daN)	A
WKUMPCL41.41.150	550	80
WKUMPCL41.41.200	550	80
WKUMPCL41.41.300	265	80
WKUMPCL41.41.400	235	80
WKUMPCL41.41.500	190	80
WKUMPCL41.41.600	120	80

HD	Référence	mm	mm	mm	mm	kg/stk	Magasin	Unité
HD	WKUMPCL41.41.150	80	200			0,520	X	STK
HD	WKUMPCL41.41.200	80	250			0,840	X	STK
HD	WKUMPCL41.41.300	80	350			0,970	X	STK
HD	WKUMPCL41.41.400	80	450			1,090	X	STK
HD	WKUMPCL41.41.500	80	550			1,220	X	STK
HD	WKUMPCL41.41.600	80	650			1,340	X	STK

A commander par emballage complet.
Charge max. (en daN): Répartie uniformément sur toute la largeur.

