



DR15.30

Profil support



16 x 12 mm

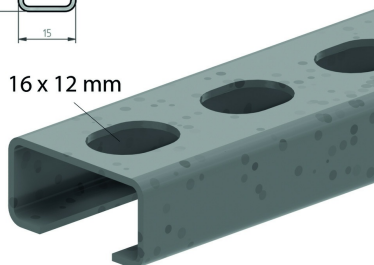

Charge max.: 100 daN

Exec. Std.

Sendzimir

Mat. Opt.

Galvanisé à chaud

HD	Référence	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Magasin	Unité
HD	DR100	15	30		100	0,060	10	X	STK
HD	DR150	15	30		150	0,080	10	X	STK
HD	DR200	15	30		200	0,110	10	X	STK
HD	DR250	15	30		250	0,130	10	X	STK
HD	DR300	15	30		300	0,160	10	X	STK
HD	DR350	15	30		350	0,190	10	X	STK
HD	DR15.30.2000	15	30		2000	0,600	40		M

A fixer avec deux tiges filetées TIM8 + écrou M8 + CRO8.
 Commandez toujours la largeur du chemin de câbles + 50 mm.