


VMB
Vloer- en muurbeugel

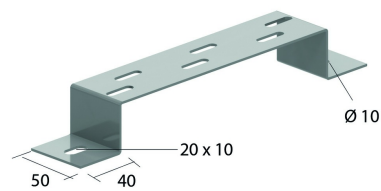

Geschikt voor gebruik als vloer-, muur- en ophangbeugel.

Max. Belasting: 200 daN

Stand. Uitv.

zinkmagnesium

Mat. Opt. PE

Duplex

HD	Artikel	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Stock	Eenh.
-	ZMVMB100	40	100			0,209	12		STK
-	ZMVMB150	40	150			0,242	12		STK
-	ZMVMB200	40	200			0,286	12		STK
-	ZMVMB300	40	300			0,363	12		STK
-	ZMVMB400	40	400			0,429	6		STK
HD	VMB100	40	100		100	0,190	12	X	STK
HD	VMB150	40	150		150	0,220	12	X	STK
HD	VMB200	40	200		200	0,260	12	X	STK
HD	VMB300	40	300		300	0,330	12	X	STK
HD	VMB400	40	400		400	0,390	6	X	STK
HD	VMB500	40	500		500	0,460	6	X	STK
HD	VMB600	40	600		600	0,530	6	X	STK

Te bestellen per volle verpakking.

Vloer- en ophangbeugel: montage met VFCL.

Muurbeugel: montage met VFK.

