


B90

Horizontale bocht 90°

Ineenschuifbaar met de kabelbaan

Radius: 100 mm

Op aanvraag: Hoogte 35 mm - 85 mm - 110 mm (enkel in SZ en HD)

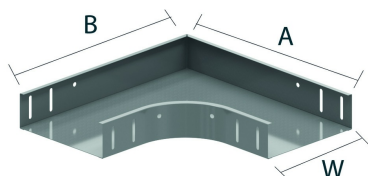

| | | | | | | | | | |
|---|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | 50 | 75 | 100 | 150 | 200 | 300 | 400 | 500 | 600 |
| A | 255 | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |
| B | 255 | 280 | 305 | 355 | 405 | 505 | 605 | 705 | 805 |

Te bevestigen met:



Zelfborgende
moer en bout
VM



Zelfborgende
moer en
kraagbout
VMK

| Artikel | Afwerking | ↑ mm | ↔ mm | → ← mm | ↔ mm | kg/stk | 📦 | Eenh. |
|----------------------|-----------|---------|---------|------------|---------|--------|---|-------|
| ZMB90.110.100 | DF | 110 | 100 | 0,75 | | 0,958 | 1 | STK |
| ZMB90.110.150 | DF | 110 | 150 | 0,75 | | 1,211 | 1 | STK |
| ZMB90.110.200 | DF | 110 | 200 | 0,75 | | 1,490 | 1 | STK |
| ZMB90.110.300 | DF | 110 | 300 | 0,75 | | 2,132 | 1 | STK |
| ZMB90.110.400 | DF | 110 | 400 | 0,75 | | 2,884 | 1 | STK |
| ZMB90.110.500 | DF | 110 | 500 | 0,75/0,9 | | 4,461 | 1 | STK |
| ZMB90.110.600 | DF | 110 | 600 | 0,75/0,9 | | 5,669 | 1 | STK |
| ZMB90.85.100 | DF | 85 | 100 | 0,75 | | 0,833 | 1 | STK |
| ZMB90.85.150 | DF | 85 | 150 | 0,75 | | 1,072 | 1 | STK |
| ZMB90.85.200 | DF | 85 | 200 | 0,75 | | 1,338 | 1 | STK |
| ZMB90.85.300 | DF | 85 | 300 | 0,75 | | 1,952 | 1 | STK |
| ZMB90.85.400 | DF | 85 | 400 | 0,75 | | 2,677 | 1 | STK |
| ZMB90.85.500 | DF | 85 | 500 | 0,75/0,9 | | 4,226 | 1 | STK |
| ZMB90.85.600 | DF | 85 | 600 | 0,75/0,9 | | 5,407 | 1 | STK |
| ZMB90.60.050 | DF | 85 | 600 | | | 0,514 | 1 | STK |
| ZMB90.60.075 | DF | 85 | 500 | | | 0,609 | 1 | STK |
| ZMB90.60.100 | DF | 60 | 100 | | | 0,712 | 1 | STK |
| ZMB90.60.150 | DF | 60 | 150 | | | 0,937 | 1 | STK |
| ZMB90.60.200 | DF | 60 | 200 | | | 1,189 | 1 | STK |
| ZMB90.60.300 | DF | 60 | 300 | | | 1,777 | 1 | STK |
| ZMB90.60.400 | DF | 60 | 400 | | | 2,475 | 1 | STK |
| ZMB90.60.500 | DF | 60 | 500 | | | 3,997 | 1 | STK |
| ZMB90.60.600 | DF | 60 | 600 | | | 5,151 | 1 | STK |

Minimum aantal bouten en moeren: 8 stuks.

Legende afwerking

- DF = Defender

