


P1001T Montageprofiel

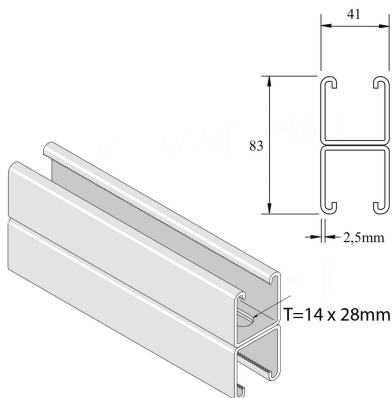

| Artikel | Afwerking | ↕ mm | ↔ mm | → ← mm | ↔ mm | kg/m | 📦 | Eenh. |
|-------------------|-----------|---------|---------|------------|---------|-------|---|-------|
| P1001TP | PO | 83 | 41 | 2,5 | 6000 | 5,220 | 6 | M |
| P1001TH | DF | 83 | 41 | 2,50 | 6000 | 5,303 | 6 | M |
| P1001TPG | PG | 83 | 41 | 2,5 | 6000 | 5,303 | 6 | M |
| P1001TDF | DF | 83 | 41 | 2,5 | 6000 | 5,303 | 6 | M |
| P1001TPGX3 | PG | 83 | 41 | 2,5 | 3000 | 5,303 | 3 | M |
| P1001TDFX3 | DF | 83 | 41 | 2,5 | 3000 | 5,303 | 3 | M |

Afkorting:

- PO = Onbehandeld
- ZP = Verzinkt
- HG = Hot-Dip Gegalvaniseerd
- DF = Defender

Legende afwerking

- PO = Onbehandeld
- DF = Defender
- PG = Voorverzinkt