


P5000 Montageprofiel

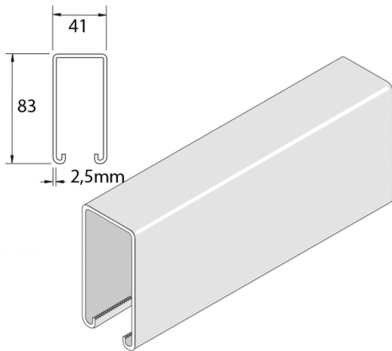

Artikel	Afwerking	↕ mm	↔ mm	→ ← mm	↔↔ mm	kg/m	📦	Eenh.
P5000P	PO	83	41	2,5	6000	4,220	6	M
P5000	ZP	83	41	2,5	6000	4,220	6	M
P5000H	HG	83	41	2,5	6000	4,633	6	M

Afkorting:

- PO = Onbehandeld
- ZP = Verzinkt
- HG = Hot-Dip Gegalvaniseerd

Legende afwerking

- PO = Onbehandeld
- ZP = Elektrolytisch verzinkt
- HG = Thermisch verzinkt