


I6KLZT
T-stuk voor I6KLZ



Te bevestigen met:

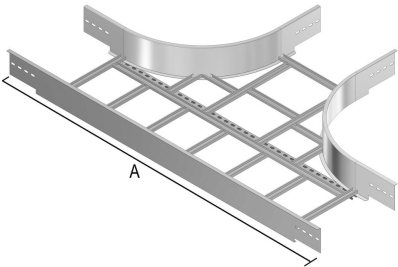

Zelfborgende
kraagbout
I6RBK

Moer (DIN 934)
I6M



Sluitring (DIN
125-1 A)
I6RO

Radius: 600 mm

Stand. Uitv.

Inox 316

	200	300	400	500	600
A	1962	2062	2162	2262	2362

HD	Artikel	↕ mm	↔ mm	→ ← mm	↔↔ mm	kg/stk		Stock	Eenh.
-	I6KLZT200	150	208			13,017	1		STK
-	I6KLZT300	150	308			13,974	1		STK
-	I6KLZT400	150	408			14,931	1		STK
-	I6KLZT500	150	508			15,888	1		STK
-	I6KLZT600	150	608			16,843	1		STK

Minimum aantal bouten en moeren: 12 stuks.

Gebeitst en gepassiveerd.