


# I6KLZX

## Kruisstuk voor I6KLZ

Radius: 600 mm

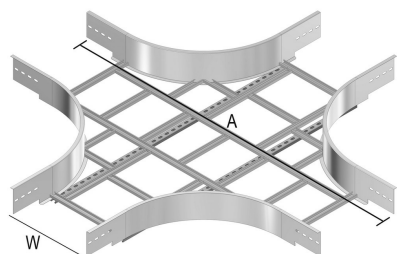

|   |      |      |      |      |      |
|---|------|------|------|------|------|
|   | 200  | 300  | 400  | 500  | 600  |
| A | 1962 | 2062 | 2162 | 2262 | 2362 |

| Artikel          | ↕<br>mm | ↔<br>mm | →  ←<br>mm | ↔<br>mm | kg/stk | 📦 | Eenh. |
|------------------|---------|---------|------------|---------|--------|---|-------|
| <b>I6KLZX200</b> | 150     | 208     |            |         | 21,007 | 1 | STK   |
| <b>I6KLZX300</b> | 150     | 308     |            |         | 22,481 | 1 | STK   |
| <b>I6KLZX400</b> | 150     | 408     |            |         | 23,807 | 1 | STK   |
| <b>I6KLZX500</b> | 150     | 508     |            |         | 25,135 | 1 | STK   |
| <b>I6KLZX600</b> | 150     | 608     |            |         | 24,771 | 1 | STK   |

### Te bevestigen met:



Zelfborgende  
kraagbout  
I6RBK

Moer (DIN 934)  
I6M

Minimum aantal bouten en moeren: 16 stuks.

Gebeitst en gepassiveerd.



Sluitring (DIN  
125-1 A)  
I6RO