



TFCL110S

TFCL met SIN

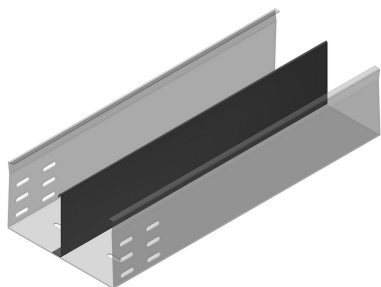

Te bevestigen met:



Koppelplaat
V85.200

Artikel	↑ mm	↔ mm	→ ← mm	↔ mm	kg/m	📦	Eenh.
TFCL110.150.200S12	110	150	2	3000	6,840	30	M
TFCL110.150.200S13	110	150	2	3000	6,840	30	M
TFCL110.150.200S23	110	150	2	3000	7,660	30	M
TFCL110.200.200S12	110	200	2	3000	7,640	30	M
TFCL110.200.200S13	110	200	2	3000	7,640	30	M
TFCL110.200.200S23	110	200	2	3000	8,460	30	M
TFCL110.250.200S12	110	250	2	3000	8,440	30	M
TFCL110.250.200S13	110	250	2	3000	8,440	30	M
TFCL110.250.200S23	110	250	2	3000	9,260	30	M
TFCL110.300.200S12	110	300	2	3000	9,240	30	M
TFCL110.300.200S13	110	300	2	3000	9,240	30	M
TFCL110.300.200S23	110	300	2	3000	10,060	30	M

S12: 1 scheidingsschot in het midden van de kabelgoot
 S13: 1 scheidingsschot op 1/3 van de rand van de kabelgoot
 S23: 2 scheidingsschotten op 1/3 van de rand van de kabelgoot