



T
T-stuk

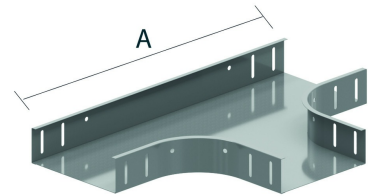

Te bevestigen met:



Ineenschuifbaar met de kabelbaan

Radius: 100 mm

Op aanvraag: Hoogte 35 mm - 85 mm - 110 mm

	50	75	100	150	200	300	400	500	600
A	458	483	508	558	608	708	808	908	1008

Artikel	Afwerking	↕ mm	↔ mm	→ ← mm	↔ mm	kg/stk	📦	Eenh.
T60.050	SZ	60	50			0,832	1	STK
T60.075	SZ	60	75			0,978	1	STK
T60.100	SZ	60	100			1,124	1	STK
T60.150	SZ	60	150			1,516	1	STK
T60.200	SZ	60	200			1,758	1	STK
T60.300	SZ	60	300			2,590	1	STK
T60.400	SZ	60	400			3,380	1	STK
T60.500	SZ	60	500			6,120	1	STK
T60.600	SZ	60	600			7,260	1	STK
ZMT60.050	DF	60	50			1,265	1	STK
ZMT60.075	DF	60	75			1,43	1	STK
ZMT60.100	DF	60	100			1,595	1	STK
ZMT60.150	DF	60	150			2,035	1	STK
ZMT60.200	DF	60	200			2,31	1	STK
ZMT60.300	DF	60	300			3,245	1	STK
ZMT60.400	DF	60	400			4,29	1	STK
ZMT60.500	DF	60	500			7,48	1	STK
ZMT60.600	DF	60	600			8,91	1	STK

Minimum aantal bouten en moeren: 12 stuks.

Legende afwerking

- SZ = Sendzimir
- DF = Defender