



AS
Aftakstuk 90°

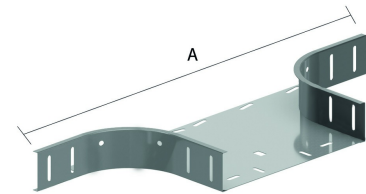

Te bevestigen met:



Zelfborgende
moer en bout
VM

Zelfborgende
moer en
kraagbout
VMK

Ineenschuifbaar met de kabelbaan

Radius: 100 mm

Op aanvraag: Hoogte 35 mm - 85 mm - 110 mm (enkel in SZ en HD)

	50	75	100	150	200	300	400	500	600
A	458	483	508	558	608	708	808	908	1008

Artikel	Afwerking	↕ mm	↔ mm	→ ← mm	↔↔ mm	kg/stk	📦	Eenh.
AS60.050	SZ	60	50			0,490	1	STK
AS60.075	SZ	60	75			0,530	1	STK
AS60.100	SZ	60	100			0,570	1	STK
AS60.150	SZ	60	150			0,650	1	STK
AS60.200	SZ	60	200			0,730	1	STK
AS60.300	SZ	60	300			0,880	1	STK
AS60.400	SZ	60	400			0,103	1	STK
AS60.500	SZ	60	500			1,524	1	STK
AS60.600	SZ	60	600			1,740	1	STK
ZMAS60.100	DF	60	100			0,627	1	STK
ZMAS60.050	DF	60	50			0,542	1	STK
ZMAS60.075	DF	60	75			0,584	1	STK
ZMAS60.150	DF	60	150			0,713	1	STK
ZMAS60.200	DF	60	200			0,88	1	STK
ZMAS60.300	DF	60	300			0,966	1	STK
ZMAS60.400	DF	60	400			1,137	1	STK
ZMAS60.500	DF	60	500			1,677	1	STK
ZMAS60.600	DF	60	600			1,914	1	STK

Minimum aantal bouten en moeren: 8 stuks.

Legende afwerking

- SZ = Sendzimir
- DF = Defender

