


KLM125SB

Угол вертикальный внутренний 90° для лотков KLM

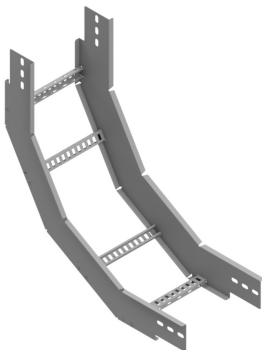

Radius: 600 mm

Стандартное исполнение		Сталь sendzimir	
Вариант исполнения		цинк магний	

HD	Артикул	↕ мм	↔ мм	→ ← мм	↔ мм	kg/stk	📦	Наличие на складе	Ед. изм.
-	KLM125SB150	125	158			5,061	1		STK
-	KLM125SB200	125	208			5,215	1		STK
-	KLM125SB300	125	308			5,522	1		STK
-	KLM125SB400	125	408			5,829	1		STK
-	KLM125SB450	125	458			5,983	1		STK
-	KLM125SB500	125	508			6,136	1		STK
-	KLM125SB600	125	608			6,443	1		STK
-	KLM125SB750	125	758			6,904	1		STK
-	KLM125SB800	125	808			7,058	1		STK
-	KLM125SB900	125	908			7,365	1		STK
-	KLM125SB1000	125	1008			7,672	1		STK
-	ZMKLM125SB150	125	158			5,061	1		STK
-	ZMKLM125SB200	125	208			5,215	1		STK
-	ZMKLM125SB300	125	308			5,522	1		STK
-	ZMKLM125SB400	125	408			5,829	1		STK
-	ZMKLM125SB450	125	458			5,983	1		STK
-	ZMKLM125SB500	125	508			6,136	1		STK
-	ZMKLM125SB600	125	608			6,443	1		STK
-	ZMKLM125SB750	125	758			6,904	1		STK
-	ZMKLM125SB800	125	808			7,058	1		STK
-	ZMKLM125SB900	125	908			7,365	1		STK
-	ZMKLM125SB1000	125	1008			7,672	1		STK

Для монтажа с:



Полукруглый болт с зубчатыми насечками (DIN 603) RBK



Гайка с зубчатыми насечками (DIN 6923) RM

Минимальное количество винтов и гаек: 8 шт.