


I4KBSI

Cable tray with interlocking ends

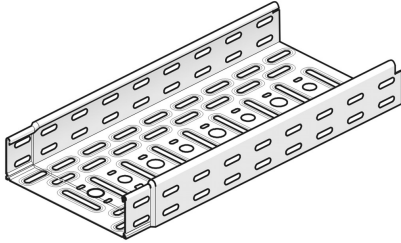

Interlocking ends
Alternative perforations
Return flanges

Standard finish

Stainless Steel 304

HD	Reference	↑ mm	↔ mm	≡ mm	↔ mm	kg /m		Stock	Unit
-	I4KBSI60.100.080	60	100	0,8	3000	1,300	3	v	M
-	I4KBSI60.200.080	60	200	0,8	3000	1,900	3	v	M
-	I4KBSI60.300.080	60	300	0,8	3000	2,400	3	v	M
-	I4KBSI60.400.100	60	400	1	3000	3,700	3		M


LOAD DIAGRAM

Graph valid for I4KBSI60. This diagram illustrates the permissible uniformly distributed loads applied to multiple supports. They comply with IEC 61537 par 10.3.3. test type III with connection to 1/5 of the span.

F = max. admissible load (daN/m)

L = support distance (m)

Max. deflection (m) = L/100

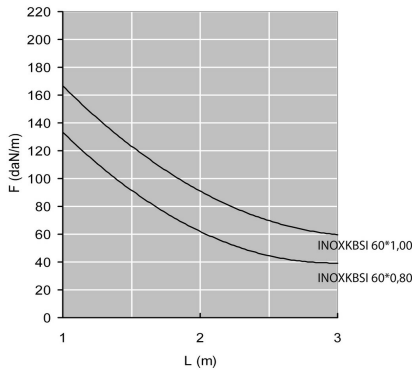

Fix with:



Fast locking for
KBSI
KBV



Toothed round
head bolt / flange
nut
I6VM